

UNICARRIERS
— UniCarriers Group —



ENGINE POWERED FORKLIFT TRUCKS
FCG-A1 Series
3,000-8,000 lbs.
(Class 4 - Cushion Tire Type)
SPECIFICATIONS

TCM CORPORATION


MAIN TRUCK SPECIFICATIONS

CHARACTERISTICS	1	Manufacturer's Name			UniCarriers	UniCarriers	UniCarriers
	2	Model	Model designation		FCG15L-A1	FCG18L-A1	FCG20L-A1
	3	Rated Load Capacity		lb (kg)	3000 (1500)	3500 (1750)	4000 (2000)
	4	Load Center	Distance	in (mm)	24 (500)	24 (500)	24 (500)
	5	Power Type			LP	LP	LP
	6	Operator Orientation			Sit	Sit	Sit
DIMENSIONS	7	Tire Type	Front & rear		Cushion	Cushion	Cushion
	8	Wheels	Number (x=driven) front/rear		2 x / 2	2 x / 2	2 x / 2
	9	Mast	Maximum fork height	in (mm)	130 (3300)	130 (3300)	130 (3300)
	10		Standard freelif	in (mm)	4 (100)	4 (100)	4.2 (105)
	11	Forks	Thickness & width	in (mm)	1.5 x 4 (40x100)	1.5 x 4 (40x100)	1.5 x 4 (40x100)
			Length (STD)	in (mm)	42 (1070)	42 (1070)	42 (1070)
	12	Tilt Angle	Standard mast - fwd/back	degree	5/10	5/10	5/10
	13	Overall Dimensions	Length (to face of forks)	in (mm)	81.9 (2080)	83.1 (2110)	89 (2260)
	14		Width (standard tires)	in (mm)	38.2 (970)	38.2 (970)	42.1 (1070)
	15		Mast lowered (OHL)	in (mm)	82.9 (2105)	82.9 (2105)	83.1 (2110)
	16		Mast extended with LBR	in (mm)	179.3 (4555)	179.3 (4555)	179.3 (4555)
	17		Height - top of OHG	in (mm)	81.1 (2060)	81.1 (2060)	82.1 (2085)
	18		Height - top of standard LBR	in (mm)	48 (1220)	48 (1220)	48 (1220)
	19		Width - standard carriage	in (mm)	32.4 (823)	32.4 (823)	36.2 (920)
	20	Grade Clearance	Ramp breakover angle	tan (%)	43	43	42
			Departure angle	tan (%)	35	30	34
			Approach angle	tan (%)	26	26	29
	21	Turning Radius	Minimum outside	in (mm)	68.3 (1735)	69.5 (1765)	76 (1930)
	22	Overhang	Front	in (mm)	15.4 (390)	15.4 (390)	16.1 (410)
	23		Rear	in (mm)	19.7 (500)	20.9 (530)	17.7 (450)
	24	Min Right Angle Stack	Add load length & clearance	in (mm)	83.7 (2125)	84.9 (2155)	92.1 (2340)
PERFORMANCE	25	Speeds Maximum	Travel - forward or reverse	mph (kmh)	10.9 (17.5)	10.9 (17.5)	10.6 (17)
	26		Lift - full/empty	fpm (mm/sec)	122/127.9 (620/650)	122/127.9 (620/650)	122/127.9 (620/650)
			Lowering - full/empty	fpm (mm/sec)	98.4 (500)	98.4 (500)	98.4 (500)
	27	Drawbar Pull Maximum	LP - full	lb (kg)	3417 (1550)	3417 (1550)	3638 (1650)
			LP - empty	lb (kg)	1543 (700)	1543 (700)	1870 (850)
	28	Gradeability Max (1.2 mph)	LP - full/empty	tan (%)	38 / 20	38 / 18	33 / 21
WEIGHT	29	Truck Weight	Standard truck - no load	lb (kg)	5980 (2710)	6420 (2910)	7130 (3235)
	30	Weight Distribution	Front axle - empty	lb (kg)	2200 (995)	2045 (925)	2815 (1275)
			Rear axle - empty	lb (kg)	3780 (1715)	4375 (1985)	4315 (1960)
			Front axle - with rated load	lb (kg)	7720 (3620)	8485 (3985)	9730 (4575)
			Rear axle - with rated load	lb (kg)	1260 (590)	1435 (675)	1400 (660)
CHASSIS & WHEELS	31	Tire Size	Front	in	18 x 6 x 12.13	18 x 6 x 12.13	21 x 7 x 15
			Rear	in	14 x 5 x 10	14 x 5 x 10	16.25 x 6 x 11.25
	32	Wheelbase		in (mm)	46.9 (1190)	46.9 (1190)	55.1 (1400)
	33	Tread - Center of Tire	Front / rear	in (mm)	32.3 (820)	32.3 (820)	35 (890)
		Headroom	SIP to bottom of OHG	in (mm)	42.1 (1070)	42.1 (1070)	42.1 (1070)
		Counterweight Height		in (mm)	45.3 (1150)	45.1 (1145)	45.9 (1165)
		Step Height		in (mm)	17.1 (435)	17.1 (435)	16.5 (420)
	34	Ground Clearance	Under mast	in (mm)	3.0 (75)	3.0 (75)	3.1 (80)
			Under power unit	in (mm)	2.6 (65)	2.6 (65)	4.1 (105)
			Under frame (WB center)	in (mm)	4.3 (110)	4.3 (110)	5.5 (140)
	35	Service Brake	Type		Drum and Shoe	Drum and Shoe	Drum and Shoe
	36	Parking Brake	Type		Hand	Hand	Hand
	37	Steering	Type		Full Hydraulic	Full Hydraulic	Full Hydraulic
DRIVE LINE	38	Engine	Manufacturer/Model		Nissan K21	Nissan K21	Nissan K21
		Rated Output	SAE gross - LP	hp (kW) @ rpm	55 (41) @ 2700	55 (41) @ 2700	55 (41) @ 2700
		Rated Torque	SAE gross - LP	ft-lb (Nm) @ rpm	111.4 (151) @ 2000	111.4 (151) @ 2000	111.4 (151) @ 2000
		Displacement		cu in (cm³)	126 (2065)	126 (2065)	126 (2065)
	39	Transmission	Type		Automatic	Automatic	Automatic
			Number speeds - fwd/rev		1/1	1/1	1/1

MAIN TRUCK SPECIFICATIONS

CHARACTERISTICS	1	UniCarriers	UniCarriers	UniCarriers	UniCarriers	UniCarriers	UniCarriers	UniCarriers
	2	FCG20HL-A1	FCG25L-A1	FCG25HL-A1	FCG28L-A1	FCG28HL-A1	FCG30HL-A1	FCG36HL-A1
	3	4000 (2000)	5000 (2500)	5000 (2500)	5500 (2750)	5500 (2750)	6000 (3000)	8000 (4000)
	4	24 (500)	24 (500)	24 (500)	24 (500)	24 (500)	24 (500)	24 (500)
	5	LP	LP	LP	LP	LP	LP	LP
	6	Sit	Sit	Sit	Sit	Sit	Sit	Sit
DIMENSIONS	7	Cushion	Cushion	Cushion	Cushion	Cushion	Cushion	Cushion
	8	2 x / 2	2 x / 2	2 x / 2	2 x / 2	2 x / 2	2 x / 2	2 x /2
	9	130 (3300)	130 (3300)	130 (3300)	130 (3300)	130 (3300)	130 (3300)	122 (3100)
	10	4.2 (105)	4.2 (105)	4.2 (105)	6.7 (170)	6.7 (170)	7.1 (180)	7.1 (180)
	11	1.5 x 4 (40x100)	1.5 x 4 (40x100)	1.5 x 4 (40x100)	1.5 x 4 (40x100)	1.5 x 4 (40x100)	2 x 5 (50x125)	2 x 5 (50x125)
		42 (1070)	42 (1070)	42 (1070)	42 (1070)	42 (1070)	42 (1070)	42 (1070)
	12	5/10	5/10	5/10	5/10	5/10	5/10	5/10
	13	89 (2260)	91.3 (2320)	91.3 (2320)	93.9 (2385)	93.9 (2385)	95.3 (2420)	100 (2540)
	14	42.1 (1070)	42.1 (1070)	42.1 (1070)	43.1(1095)	43.1(1095)	43.1 (1095)	45.9 (1165)
	15	83.1 (2110)	83.1 (2110)	83.1 (2110)	82.7 (2100)	82.7 (2100)	82.7 (2100)	83.1 (2110)
	16	179.3 (4555)	179.3 (4555)	179.3 (4555)	179.3 (4555)	179.3 (4555)	179.3 (4555)	178.7 (4540)
	17	82.1 (2085)	82.1 (2085)	82.1 (2085)	82.1 (2085)	82.1 (2085)	82.1 (2085)	82.3 (2090)
	18	48 (1220)	48 (1220)	48 (1220)	48 (1220)	48 (1220)	48 (1220)	48 (1220)
	19	36.2 (920)	36.2 (920)	36.2 (920)	40.2 (1020)	40.2 (1020)	40.2 (1020)	40.2 (1020)
	20	42	42	42	42	42	42	44
		34	30	30	28	28	27	32
		29	26	26	26	26	26	24
	21	76 (1930)	78.3 (1990)	78.3 (1990)	79.5 (2020)	79.5 (2020)	80.7 (2050)	83.9 (2130)
	22	16.1 (410)	16.1 (410)	16.1 (410)	17.3 (440)	17.3 (440)	17.7 (450)	17.9 (455)
	23	17.7 (450)	20.1 (510)	20.1 (510)	21.5 (545)	21.5 (545)	22.4 (570)	23 (585)
	24	92.1 (2340)	94.4 (2400)	94.4 (2400)	96.8 (2460)	96.8 (2460)	98.4 (2500)	101.8 (2585)
PERFORMANCE	25	10.6 (17)	10.6 (17)	10.6 (17)	10.6 (17)	10.6 (17)	10.6 (17)	11.5 (18.5) fwd / 9.9 (16) rev
	26	129.9/137.8 (660/700)	118.1/127.9 (600/650)	129.9/137.8 (660/700)	94.5/102.4 (480/520)	104.3/110.2 (530/560)	104.3/110.2 (530/560)	88.6/92.5 (450/470)
		98.4 (500)	98.4 (500)	98.4 (500)	98.4 (500)	98.4 (500)	98.4 (500)	82.7/70.9 (420/360)
	27	4189 (1900)	3638 (1650)	4189 (1900)	3638 (1650)	4189 (1900)	4189 (1900)	6228 (2825)
		1870 (850)	1764 (800)	1764 (800)	1653 (750)	1653 (750)	1764 (800)	2425 (1100)
	28	39 / 21	28 / 16	33 / 16	27 / 16	32 / 16	28 / 16	34 / 15
WEIGHT	29	7130 (3235)	7940 (3600)	7940 (3600)	8860 (4015)	8860 (4015)	9350 (4240)	11150 (5055)
	30	2815 (1275)	2590 (1175)	2590 (1175)	2705 (1225)	2705 (1225)	2790 (1265)	3150 (1425)
		4315 (1960)	5350 (2425)	5350 (2425)	6155 (2790)	6155 (2790)	6560 (2975)	8000 (3630)
		9730 (4575)	11375 (5360)	11375 (5360)	12355 (5820)	12355 (5820)	13360 (6300)	16190 (7320)
		1400 (660)	1565 (740)	1565 (740)	2005 (945)	2005 (945)	1990 (940)	2960 (1335)
CHASSIS & WHEELS	31	21 x 7 x 15	21 x 7 x 15	21 x 7 x 15	21 x 8 x 15	21 x 8 x 15	21 x 8 x 15	22 x 9 x 16
		16.25 x 6 x 11.25	16.25 x 6 x 11.25	16.25 x 6 x 11.25	16.25 x 6 x 11.25	16.25 x 6 x 11.25	16.25 x 6 x 11.25	18 x 6 x 12.12
	32	55.1 (1400)	55.1 (1400)	55.1 (1400)	55.1 (1400)	55.1 (1400)	55.1 (1400)	59.1 (1500)
	33	35 (890)	35 (890)	35 (890)	35.8/35 (910/890)	35.8/35 (910/890)	35.8/35 (910/890)	37/36.6 (940/930)
		42.1 (1070)	42.1 (1070)	42.1 (1070)	42.1 (1070)	42.1 (1070)	42.1 (1070)	42.1 (1070)
		45.9 (1165)	45.9 (1165)	45.9 (1165)	45.7 (1160)	45.7 (1160)	45.7 (1160)	46.4 (1180)
		16.5 (420)	16.5 (420)	16.5 (420)	16.5 (420)	16.5 (420)	16.5 (420)	17.1 (435)
	34	3.1 (80)	3.1 (80)	3.1 (80)	2.8 (70)	2.8 (70)	2.8 (70)	3.1 (80)
		4.1 (105)	4.1 (105)	4.1 (105)	3.5 (90)	3.5 (90)	3.5 (90)	3.7 (95)
		5.5 (140)	5.5 (140)	5.5 (140)	5.5 (140)	5.5 (140)	5.5 (140)	5.7 (145)
	35	Drum and Shoe	Drum and Shoe	Drum and Shoe	Drum and Shoe	Drum and Shoe	Drum and Shoe	Drum and Shoe
	36	Hand	Hand	Hand	Hand	Hand	Hand	Hand
	37	Full Hydraulic	Full Hydraulic	Full Hydraulic	Full Hydraulic	Full Hydraulic	Full Hydraulic	Full Hydraulic
DRIVE LINE	38	Nissan K25	Nissan K21	Nissan K25	Nissan K21	Nissan K25	Nissan K25	Nissan K25
		62.9 (46.9) @ 2700	55 (41) @ 2700	62.9 (46.9) @ 2700	55 (41) @ 2700	62.9 (46.9) @ 2700	62.9 (46.9) @ 2700	62.9 (46.9) @ 2700
		138.7 (188) @ 1600	111.4 (151) @ 2000	138.7 (188) @ 1600	111.4 (151) @ 2000	138.7 (188) @ 1600	138.7 (188) @ 1600	138.7 (188) @ 1600
		151.8 (2488)	126 (2065)	151.8 (2488)	126 (2065)	151.8 (2488)	151.8 (2488)	151.8 (2488)
	39	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
		1/1	1/1	1/1	1/1	1/1	1/1	2/1

DIMENSIONS

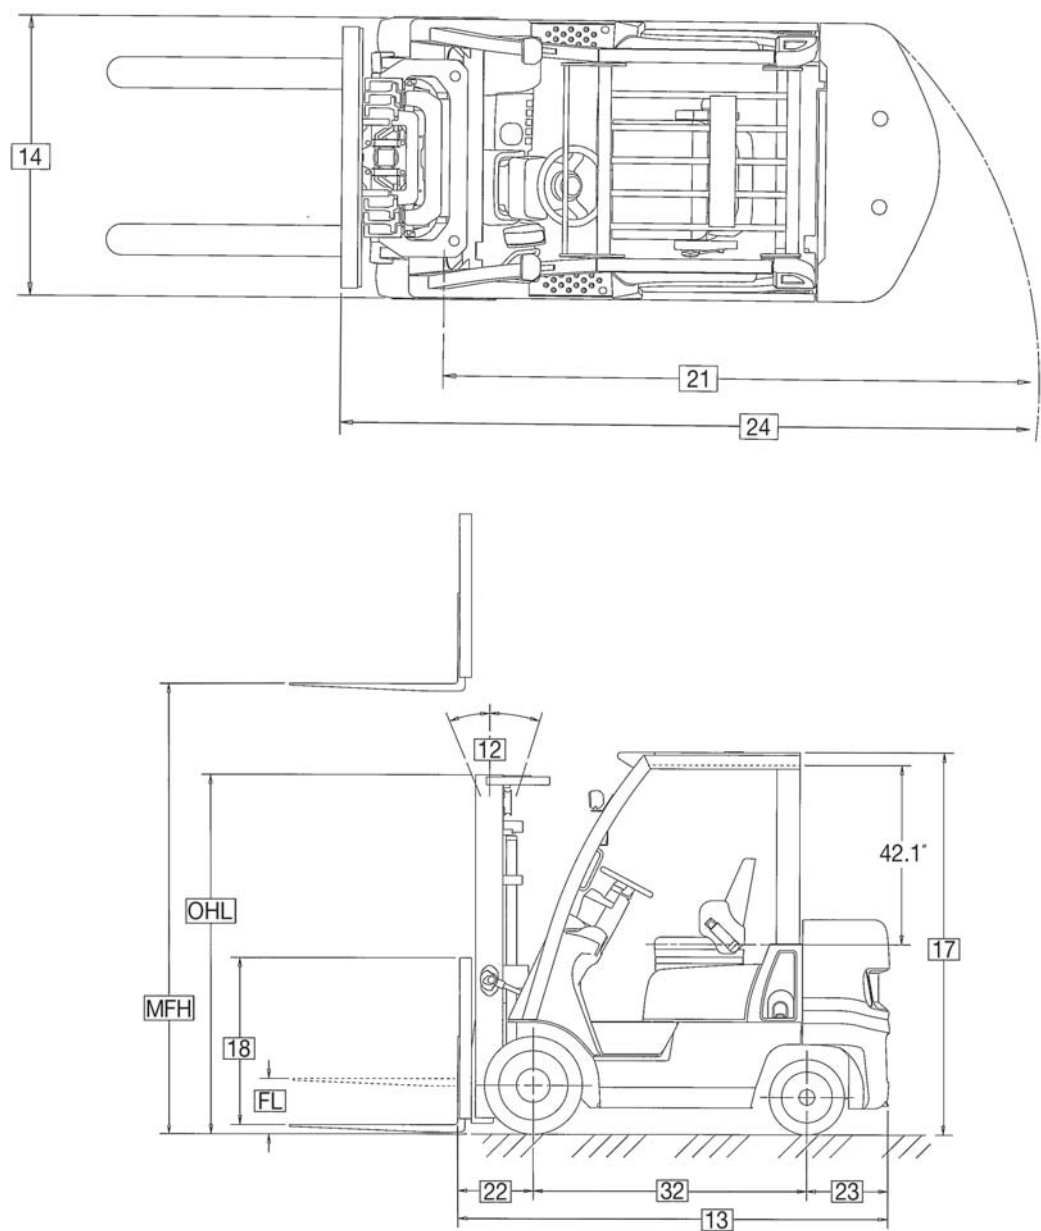

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24" Load Center	
						FCG15L-A1	FCG18L-A1
		in	in	in	degrees	lb	lb
TWO STAGE (Wide view 2W)	2W203T	80	62.1	4	10/5	3000	3500
	2W270	106	71.1	4	5/5	3000	3500
	2W300	118	77	4	5/10	3000	3500
	2W330	130	82.9	4	5/10	3000	3500
	2W350	138	88.2	4	5/10	3000	3500
	2W370	146	93.1	4	5/10	3000	3500
	2W400	157	100.6	4	5/10	3000	3500
	2W450	177	110.5	4	5/5	2900	2700
	2W500	197	120.3	4	5/5	1600	1400
TWO STAGE (Full free 2F)	2F270	105.5	72	47.4	5/10	3000	3500
	2F300	117.5	78	53.4	5/10	3000	3500
	2F330	129.5	84	59.4	5/10	3000	3500
	2F350	137.5	88	63.4	5/10	3000	3500
	2F370	145.5	92	67.4	5/10	3000	3500
	2F400	157.5	98	73.4	5/10	2950	3450
THREE STAGE (Full free 3F)	3F385	152	71.1	46.9	5/5	2950	3450
	3F430	169	77	52.8	5/5	2850	3350
	3F475	187	82.9	58.7	5/5	2750	3200
	3F515	203	88.2	64	5/5	2650	3100
	3F550	217	93.1	68.9	5/5	2550	2450
	3F600	236	100.6	76.4	5/5	1650	1200
	3F650	256	110.5	86.2	5/5	900	500


MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24” Load Center
		FCG20L-A1/FCG20HL-A1				
		in	in	in	degrees	lb
TWO STAGE (Wide view 2W)	2W203T	80	62.1	4	10/5	4000
	2W270	106	71.3	4.2	5/5	4000
	2W300	118	77.2	4.2	5/5	4000
	2W330	130	83.1	4.2	5/10	4000
	2W350	138	88.4	4.2	5/10	4000
	2W370	146	93.3	4.2	5/5	4000
	2W400	157	100.8	4.2	5/10	4000
	2W450	177	110.6	4.2	5/5	3850
	2W500	197	120.5	4.2	5/5	3700
TWO STAGE (Full free 2F)	2F270	105.5	72	47.4	5/10	4000
	2F300	117.5	78	53.4	5/10	4000
	2F330	129.5	84	59.4	5/10	4000
	2F350	137.5	88	63.4	5/10	4000
	2F370	145.5	92	67.4	5/10	4000
	2F400	157.5	98	73.4	5/10	3900
THREE STAGE (Full free 3F)	3F385	152	71.3	46.9	5/5	4000
	3F430	169	77.2	52.8	5/5	3850
	3F475	187	83.1	58.7	5/5	3700
	3F515	203	88.4	64.0	5/5	3600
	3F550	217	93.3	68.9	5/5	3400
	3F600	236	100.8	76.4	5/5	2700
	3F650	256	110.6	86.2	5/5	2000
	3F700	276	120.5	96.1	5/5	1000

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24” Load Center
		FCG25L-A1/FCG25HL-A1				
		in	in	in	degrees	lb
TWO STAGE (Wide view 2W)	2W203T	80	62.1	4	10/5	5000
	2W270	106	71.3	4.2	5/5	5000
	2W300	118	77.2	4.2	5/5	5000
	2W330	130	83.1	4.2	5/10	5000
	2W350	138	88.4	4.2	5/10	5000
	2W370	146	93.3	4.2	5/5	5000
	2W400	157	100.8	4.2	5/10	5000
	2W450	177	110.6	4.2	5/5	4850
	2W500	197	120.5	4.2	5/5	4650
TWO STAGE (Full free 2F)	2F270	105.5	72	47.4	5/10	5000
	2F300	117.5	78	53.4	5/10	5000
	2F330	129.5	84	59.4	5/10	5000
	2F350	137.5	88	63.4	5/10	5000
	2F370	145.5	92	67.4	5/10	5000
	2F400	157.5	98	73.4	5/10	4950
THREE STAGE (Full free 3F)	3F385	152	71.3	46.9	5/5	5000
	3F430	169	77.2	52.8	5/5	4850
	3F475	187	83.1	58.7	5/5	4700
	3F515	203	88.4	64.0	5/5	4550
	3F550	217	93.3	68.9	5/5	4000
	3F600	236	100.8	76.4	5/5	3000
	3F650	256	110.6	86.2	5/5	2300
	3F700	276	120.5	96.1	5/5	1200

DIMENSIONS

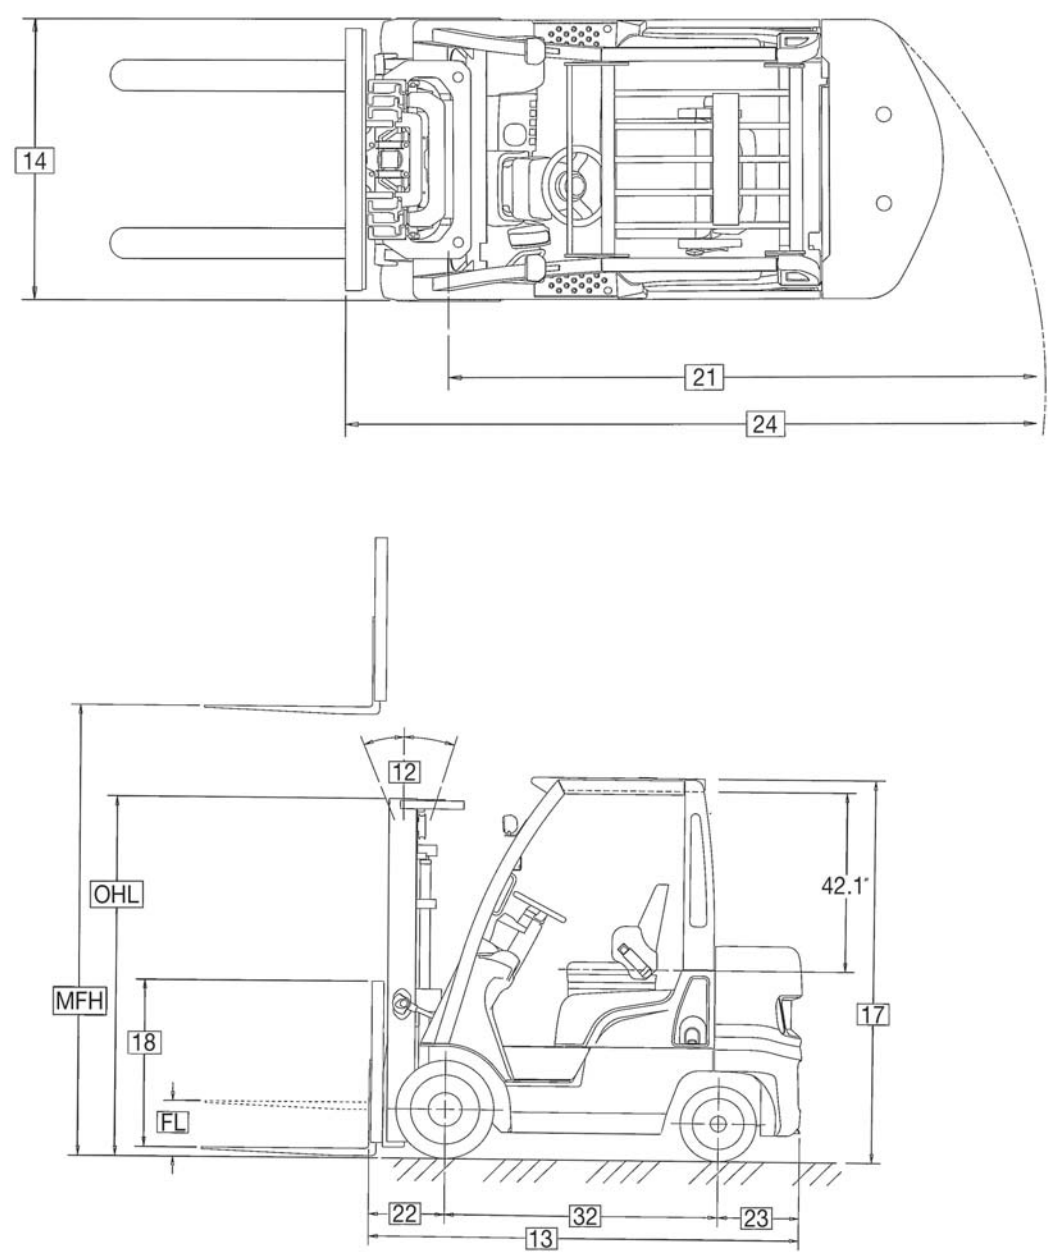

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24" Load Center
						FCG28L-A1/FCG28HL-A1
		in	in	in	degrees	lb
TWO STAGE (Wide view 2H)	2H270	106	70.9	6.7	5/10	5500
	2H300	118	76.8	6.7	5/10	5500
	2H330	130	82.7	6.7	5/10	5500
	2H350	138	88	6.7	5/10	5500
	2H370	146	92.9	10.2	5/10	5500
	2H400	157	100.4	10.2	5/10	5500
	2H450	177	110.2	10.2	5/5	5300
	2H500	197	120.1	10.2	5/5	5100
TWO STAGE (Full free 2F)	2F270	105.5	71.7	45.3	5/10	5500
	2F300	117.5	77.7	51.3	5/10	5500
	2F330	129.5	83.7	57.3	5/10	5500
	2F350	137.5	87.7	61.3	5/10	5500
	2F370	145.5	91.7	65.3	5/10	5500
	2F400	157.5	97.7	71.3	5/10	5400
	2F450	177	110.2	10.2	5/5	5300
THREE STAGE (Full free 3F)	3F385	152	76.7	56.1	5/5	5500
	3F430	169	82.6	62	5/5	5300
	3F475	187	87.9	67.3	5/5	5150
	3F515	203	92.8	72.2	5/5	5000
	3F550	217	100.3	79.7	5/5	4400
	3F600	236	110.1	89.6	5/5	3200
	3F650	256	120	99.4	5/5	2300
	3F700	276	129.8	109.3	5/5	1100

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24” Load Center
						FCG30HL-A1
		in	in	in	degrees	lb
TWO STAGE (Wide view 2H)	2H270	106	70.9	7.1	5/10	6000
	2H300	118	76.8	7.1	5/10	6000
	2H330	130	82.7	7.1	5/10	6000
	2H350	138	88	7.1	5/10	6000
	2H370	146	92.9	10.6	5/10	6000
	2H400	157	100.4	10.6	5/10	6000
	2H450	177	110.2	10.6	5/5	5800
	2H500	197	120.1	10.6	5/5	5550
TWO STAGE (Full free 2F)	2F270	105.5	71.7	45.7	5/10	6000
	2F300	117.5	77.7	51.7	5/10	6000
	2F330	129.5	83.7	57.7	5/10	6000
	2F350	137.5	87.7	61.7	5/10	6000
	2F370	145.5	91.7	65.7	5/10	6000
	2F400	157.5	97.7	71.7	5/10	5950
THREE STAGE (Full free 3F)	3F385	152	76.7	56.1	5/5	6000
	3F430	169	82.6	62	5/5	5800
	3F475	187	87.9	67.3	5/5	5650
	3F515	203	92.8	72.2	5/5	5450
	3F550	217	100.3	79.7	5/5	4650
	3F600	236	110.1	89.6	5/5	3400
	3F650	256	120	99.4	5/5	2300
	3F700	276	129.8	109.3	5/5	600

MAST SPECIFICATIONS & RATED CAPACITIES

Mast Name		Maximum Fork Height	Overall Height Lowered	Free Lift	Tilt Angle Forward/ Backward	Rated Capacity at 24” Load Center
						FCG36HL-A1
		in	in	in	degrees	lb
TWO STAGE (Wide view 2H)	2H280	110	77.2	7.1	5/10	8000
	2H310	122	83.1	7.1	5/10	8000
	2H350	138	93.3	10.6	5/10	8000
	2H380	150	100.8	10.6	5/10	8000
	2H430	169	110.6	10.6	5/5	7800
TWO STAGE (Full free 2F)	2F280	110	77.2	50	5/10	8000
	2F310	122	83.1	55.9	5/10	8000
	2F350	138	93.3	66.1	5/10	8000
	2F380	150	100.8	73.6	5/10	7950
THREE STAGE (Full free 3F)	3F355	140	71.3	45.1	5/5	7850
	3F400	157	77.2	51	5/5	7750
	3F445	175	83.1	56.9	5/5	7550
	3F485	191	88.4	62.2	5/5	7350
	3F520	205	93.3	67.1	5/5	7200
	3F570	224	100.8	74.6	5/5	5600
	3F620	244	110.6	84.4	5/5	2800
	3F670	264	120.5	94.3	5/5	1200

STANDARD EQUIPMENT

- Nissan K21 and K25 industrial engines with Electronic Concentrated Control System (ECCS)
- Operator Presence System
- Full Suspension Seat
- Tilt adjustable steering wheel with memory
- Multi-function LCD display with operator PIN security access
- On-Board Diagnostics with programmable service reminder
- Speedometer and F/N/R transmission indicator
- Low LP fuel warning light
- Cushioned Stability Control
- Hydrostatic Power Steering
- Three-spool control valve with pressure relief
- Swing-out LP bracket
- Headlights with guards
- 5-piece reinforced overhead guard
- One piece diamond plate floorboard
- Back-up alarm and lights
- Rear combination Lights
- Side view mirrors
- Small diameter steering wheel with spinner knob
- Aluminum square fin radiator

OPTIONAL EQUIPMENT

- Travel speed control and (Power/Economy settings)
- U.L. safety rating
- Swing down LP bracket
- LED headlights
- LED turn signals with rear brake and backup lights
- Rear working light linked with backwards travel
- Strobe Light
- Fire extinguisher
- Tilt cylinder boots
- Pre-Air cleaner
- Muffler with diffusion tailpipe
- Non-Marking tires
- Smooth Tires
- Hang on or integral side shifter
- Single or Double internal hose kits
- Bottler's Tilt
- Radiator Dust Screen
- Plastic rain guard



by
UNICARRIERS
UniCarriers Corporation
Bellport E
6-22-7, Minami-Oi, Shinagawa-ku
Tokyo 140-0013, Japan
TEL: +81-3-6730-3370
FAX: +81-3-6730-3371
<http://www.unicarriers.co.jp/en/>

Distributed by